


Framed Panel with Corner-Set Diamond Blocks

Quilt Designed by eQuilter

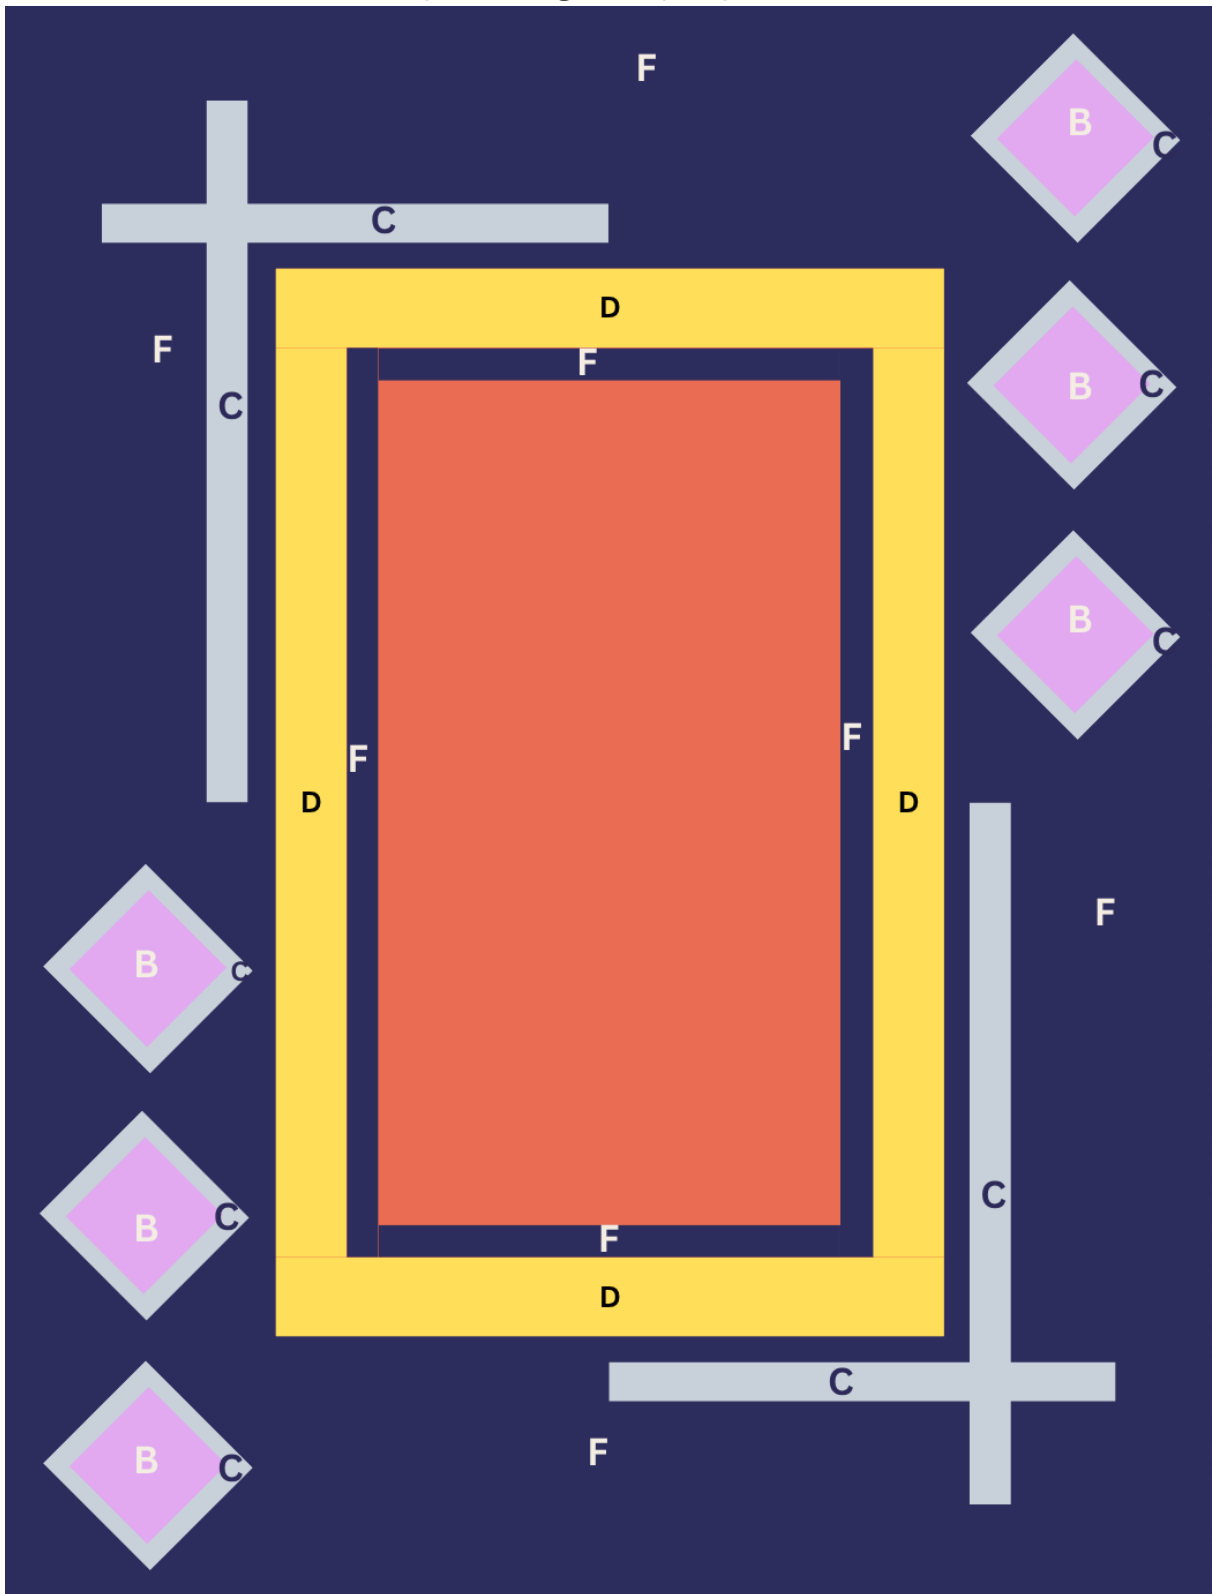

59" x 78"

Skill Level: Confident Beginner

Finished Quilt Size: 59" x 78"

Please read all instructions before beginning. Pre-washing NOT recommended.

Generic Color Key

The letters below match the labels used on the quilt diagrams and piecing-unit illustrations throughout this pattern. Swap in your own fabric choices for each letter.

- A** Fabric A — Panel
- B** Fabric B — Framed Block Center
- C** Fabric C — Accent Strips
- D** Fabric D — Ombre Border
- E** Fabric E — Binding
- F** Fabric F — Frame / Sashing / Outer Border

Yardages and Cutting

WOF is width of fabric from selvage edge to selvage edge. LOF is length of fabric, parallel to the selvage edges.

Remove as little fabric as possible when trimming selvages and squaring strip ends.

1 Fabric A Panel

- Trim to 22 1/2" x 41 1/2" specific to original panel.

1/2 yard Fabric B

- 1 strip 6 1/8" x WOF; cut into (6) 6 1/8" squares.

3/4 yards Fabric C

- 3 strips 2 1/2" x WOF; cut into (2) strips each: 27 1/2", 18" 7 1/2", and 5 1/2".
- 6 strip 1 1/4" x WOF; cut into (12) 1 1/4" x 7 5/8" strips and (12) 1 1/4" x 6 1/8" strips.

3/4 yard Fabric D

- 2 strips 4" x WOF cut into (2) 32 1/2" strips.
- Cut into 2 strips of 4" x WOF

3/4 yard Fabric E

- 8 strips 2 1/4" x WOF for binding.

2 3/4 yards Fabric F

- 6 strips 2" x WOF; cut into (2) strips each 41 1/2",

- 35 1/2", 25 1/2" and 16" for panel framing.
- 2 strips 2" x WOF for panel framing.
- 2 strips 10 1/2" x WOF; cut into (2) 10 1/2" x 18" rectangles, (4) 3 1/2" x 10 1/2" strips and (4) 2 1/2" x 10 1/2" strips.
- 2 strips 5 7/8" x WOF; cut into (12) 5 7/8" squares, cut in half diagonally to make 24 triangles.
- 3 strips 8 1/2" x WOF; cut into (2) 8 1/2" x 27 1/2" rectangles, (2) 8 1/2" x 18" rectangles, (2) 5 1/2" x 8 1/2" rectangles and (2) 2 1/2" x 3 1/2" rectangles.
- 7 strips 2 1/2" x WOF for border.

5 1/4 yards of 42" backing fabric

- 2 strips 93" x WOF

OR

2 1/4 yards wide backing fabric

- 1 piece 74" x 93"




Batting

- 1 piece 74" x 93"

Piecing the Blocks

Use a 1/4" seam allowance for all stitching. Press seams as directed.

1. Sew the $1\frac{1}{4}$ " x $6\frac{1}{8}$ " Fabric C strips to opposite sides of each $6\frac{1}{8}$ " Fabric B square. Press seams toward the center. Add the $1\frac{1}{4}$ " x $7\frac{5}{8}$ " strips to the remaining sides of the squares to complete (6) $7\frac{5}{8}$ " x $7\frac{5}{8}$ " framed squares. Press seams toward the strips.

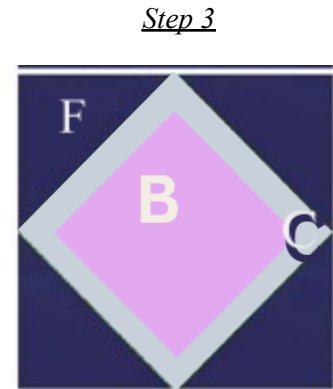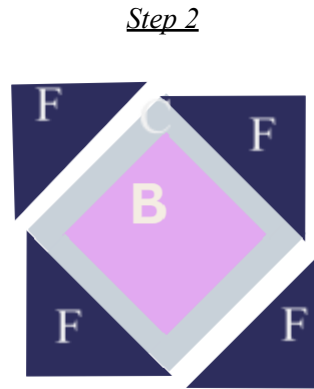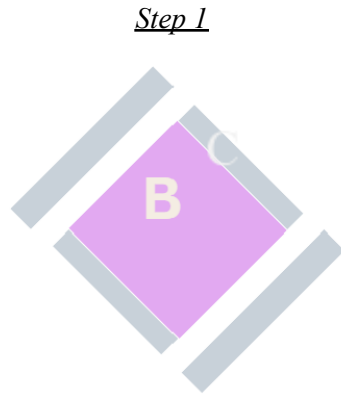

2. Center and stitch a Fabric F triangle to opposite sides of each framed square. Press seams toward the triangles. Repeat on the remaining sides of each square to complete (6) $10\frac{1}{2}$ " x $10\frac{1}{2}$ " Framed blocks.

3. Stitch a $2\frac{1}{2}$ " x $5\frac{1}{2}$ " Fabric C rectangle to one end of the $5\frac{1}{2}$ " x $8\frac{1}{2}$ " Fabric F rectangles to make a $5\frac{1}{2}$ " x $10\frac{1}{2}$ " pieced strip. Repeat to make a second pieced strip. Press seam toward the Fabric F rectangle.



4. Sew a $2\frac{1}{2}$ " x $3\frac{1}{2}$ " Fabric F rectangle to one end of the $2\frac{1}{2}$ " x $7\frac{1}{2}$ " Fabric C rectangles to make a $2\frac{1}{2}$ " x $10\frac{1}{2}$ " pieced strip. Repeat to make a second pieced strip. Press seam toward the Fabric F rectangle.



5. Join 1 of each pieced strip and add a $3\frac{1}{2}$ " x $10\frac{1}{2}$ " Fabric F rectangle to one long side to make a $10\frac{1}{2}$ " x $10\frac{1}{2}$ " Corner block, as shown. Repeat to make a second Corner block. Press seams away from the center strips.

Completing the Quilt

Refer to the exploded quilt diagram as needed throughout.

1. Join the 2 " x $41\frac{1}{2}$ " Fabric F strips to the long sides of the panel and the 2 " x $25\frac{1}{2}$ " strips to the top and bottom. Press seams toward the strips.

2. Stitch 4 " x WOF fabric D strips to long sides of the framed panel. Then sew the (2) 4 " x $32\frac{1}{2}$ " light Fabric D strips to the top and bottom. Press seams toward the strips.

3. Stitch a 2" x WOF and a 2" x 16" Fabric F strip short ends together to make a long strip. Press seam to one side. Trim to 51 1/2". Repeat to make a second 51 1/2" strip. Sew the strips to the long sides of the framed panel and the 2" x 35 1/2" Fabric F strips to the top and bottom to complete the 35 1/2" x 54 1/2" panel center. Press seams toward the strips.

4. **Left & Right Strips:** Sew a 2 1/2" x 27 1/2" Fabric C strip to the right long edge of (1) 8 1/2" x 27 1/2" Fabric F rectangle to make the 10 1/2" x 27 1/2" left pieced unit.

5. Stitch a 3 1/2" x 10 1/2" Fabric F strip to the bottom of the pieced unit. Press seam toward the Fabric F strip. Add a Framed block, (1) 2 1/2" x 10 1/2" Fabric F strip, (1) Framed block, and (1) 2 1/2" x 10 1/2" Fabric F strip to make the 10 1/2" x 54 1/2" left strip. Press all seams toward the Fabric F strips.

6. Repeat steps 4 and 5 to make the right strip, except stitch the Fabric C strip to the left edge of the Fabric F rectangle and sew the Fabric F strips and blocks to the top of the pieced unit as shown.

7. Sew the strips to the long sides of the panel center. Press seams toward the panel center.

8. **Top & Bottom Rows:** Stitch a 2 1/2" x 18" Fabric C strip to the bottom of (1) 8 1/2" x 18" Fabric F rectangle. Press seam toward the Fabric F rectangle. Add a 10 1/2" x 18" Fabric F rectangle and a Framed block to the right end of the pieced unit. Press seams toward the rectangle. Sew a Corner block to the left end, as shown, to complete the 10 1/2" x 55 1/2" top row. Press seam toward the Corner block.

9. Repeat step 8 to make the bottom row, except sew the Fabric F rectangle and Framed block to the left end of the pieced unit and the Corner block to the right end (as shown).

10. Stitch the rows to the top and bottom of the center section to complete the 55 1/2" x 74 1/2" quilt center. Press seams toward the center section.

11. Sew the 2 1/2" x WOF Fabric F strips short ends together to make a long strip. Press seams to one side. Cut into (2) 74 1/2" and (2) 59 1/2" strips. Stitch the longer strips to the long sides of the quilt center and the shorter strips to the top and bottom. Press seams toward the strips.

12. If using 42" backing fabric, remove the selvedge edges from the backing pieces. Join the pieces on the long edges with a 1/2" seam allowance. Press seam open. Trim to make the 74" x 93" backing piece.

13. Layer the quilt top with the backing and batting pieces. Quilt as desired. Trim batting and backing even with the top.

14. Join the Fabric E binding strips on the short ends with diagonal seams to make a long strip. Trim seams to 1/4 " and press open. Press the strip in half along the length with wrong sides together. Bind the quilt edges using your favorite method to complete the quilt.

