

Kindred Canines

Quilt Designed by eQuilter



50" x 56"


Skill Level: Confident Beginner**Finished Quilt Size:** 50" x 56"*Please read all instructions before beginning. Pre-washing NOT recommended.*

Yardages and Cutting

WOF is width of fabric from selvage edge to selvage edge. LOF is length of fabric, parallel to the selvage edges. Remove as little fabric as possible when trimming selvages and squaring strip ends.

Kindred Canines panel

- Trim to 22 1/2" wide, keeping the black even on the long sides.
- Trim 3/8" up from the red stripe at the top of the smaller rectangle. Trim 13 1/2" down from there to make the 13 1/2" x 22 1/2" B piece.
- Trim 1 1/4" up from the top of the larger rectangle. Trim 23 1/2" down from there to make the 23 1/2" x 22 1/2" A piece.

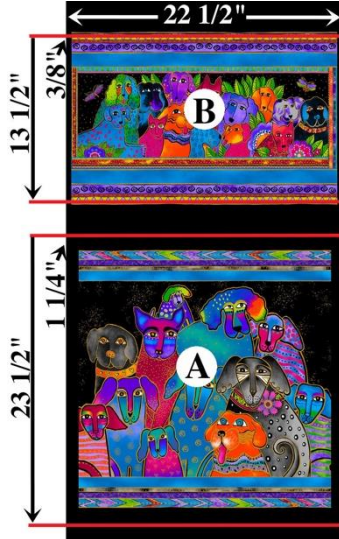

Kindred Canines squares panel

- Fussy-cut (14) 5 1/2" squares, keeping the framing even all around.

5/8 yard black words print


- 6 strips 2 1/4" x WOF for binding.

1 1/8 yards black solid

- 5 strips 3" x WOF for outer border.
- 6 strips 2" x WOF; trim to (4) 41 1/2" strips and (2) 38 1/2" strips for panel center.
- 2 strips 1 1/2" x WOF; cut into (12) 1 1/2" x 5 1/2" sashing strips.

1 3/4 yards border stripe

- Fussy-cut (1) 5 1/2" x LOF strip from the left edge of the stripe, beginning 1/8" into the selvage as shown and cutting 5 1/2" over from there. Trim to 22 1/2" and label C.
- Fussy-cut (2) 4" x LOF strips, beginning 1/4" above the orange stripe at the top of the dachshunds and then cutting 4" over from there. Trim to 56" for side borders.
- Fussy-cut (2) 4" x LOF strips, beginning 1/4" from the gold outline above the green/blue dog stripe as shown and then cutting 4" over from there. Trim to 50" for top/bottom borders.

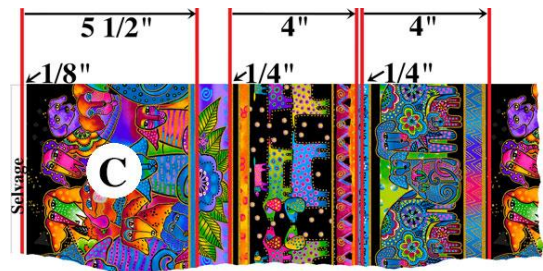

3 7/8 yards 44/45" backing fabric

4 1/8 yards directional backing

- 2 strips 66" x WOF OR
- 2 strips 72" x WOF for directional fabric

OR

2 yards wide backing fabric

- 1 piece 66" x 72"

Batting

- 1 piece 66" x 72"

Completing the Quilt


Use a 1/4" seam allowance for all stitching. Press seams as directed. Refer to the exploded quilt diagram as needed throughout the following steps.

- Sew the A panel rectangle between the C border stripe strip and the B panel rectangle to make the 22 1/2" x 41 1/2" center panel. Press seams toward the A rectangle.
- Stitch 7 panel squares top to bottom with (6) 1 1/2" x 5 1/2" black sashing strips to make a 5 1/2" x 41 1/2" panel strip. Press seams toward the black strips. Repeat to make a second panel strip.

3. Sew each panel strip between (2) 2" x 41 1/2" black strips to make (2) 8 1/2" x 41 1/2" side strips. Press seams toward the black strips. Stitch to the long sides of the center panel. Press seams toward the strips.

4. Stitch the 2" x 38 1/2" black strips to the top and bottom of the panel section to complete the 38 1/2" x 44 1/2" quilt center. Press seams toward the strips.

5. Center and sew the 56" border stripe strips to the sides of the quilt center, beginning, ending and locking stitches 1/4" from the corners of the framed panel. Repeat with the 50" strips on the top and bottom. Miter corners using your favorite method, checking to be sure that all corners lie flat and the stripe sections match. Trim mitered corner seams to 1/4" and press open. Press border seams toward the border strips.

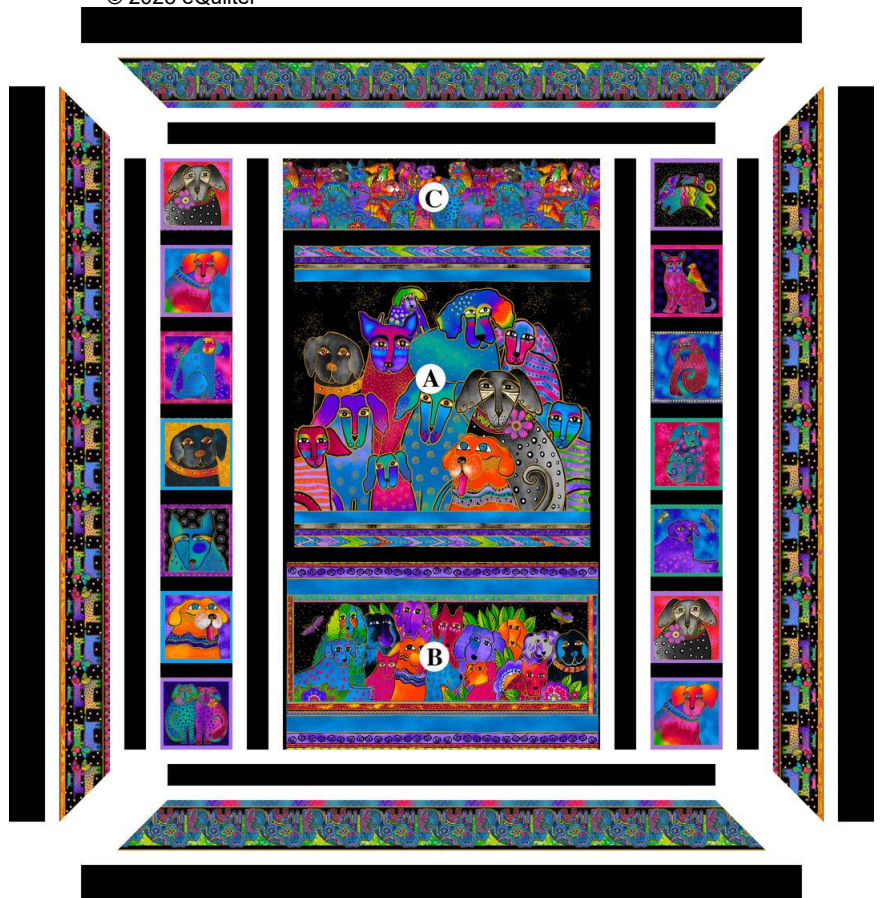

6. Stitch the 3" x WOF black strips short ends together to make a long strip. Press seams to one side. Cut into 2 strips each 51 1/2" and 50 1/2". Sew the longer strips to the sides of the panel center and the shorter strips to the top and bottom to complete the top. Press seams toward the strips.

7. If using 44/45" backing fabric, remove the selvage edges from the backing pieces. Join the pieces on the long edges with a 1/2" seam allowance. Press seam open. Trim to make the 66" x 72" backing piece.

8. Layer the quilt top with the backing and batting pieces. Quilt as desired. Trim batting and backing even with the top.

9. Join the black word print binding strips on the short ends with diagonal seams to make a long strip. Press seams in one direction. Press the strip in half along the length with wrong sides together.

10. Bind the quilt edges using your favorite method to complete the quilt.