

Toby Lischko presents

TL-25

Diamond Puzzle Batik



Gateway Quilts & Stuff, Inc.
212 Fox Meadow Lane
Beaufort, MO 63013
(314) 913-1197

Toby Lischko, Designer/Author
tlischko@yahoo.com
www.gatewayquiltsnstuff.com

©Toby Lischko, 2014

Quilt size: 52" x 63"
Intermediate Level

Fabric requirements:
Stripe batik - 4 yards
Solid fabric - 1-1/8 yards
Backing 3-1/4 yards

All rights reserved. No part of this pattern may be photocopied or reproduced without written consent of the designer, Toby Lischko. All finished items produced from this pattern may not be used commercially.

The enclosed pattern is presented in good faith: however, no warranty or guarantee of results is given.

Diamond Puzzle Batik

TL-25

Quilt size: 52" x 63"

Designed by Toby Lischko
on EQ7

PLEASE READ ALL INSTRUCTIONS BEFORE BEGINNING

Intermediate Level Quilt Pattern

General instructions

- * All seams are sewn with 1/4". (WOF = 44" Width of Fabric)
- * Some batiks have a noticeable right and wrong side. Check to see if yours does when cutting.
- * You will be working with bias edges, so take care not to stretch them when sewing.


CUTTING INSTRUCTIONS

From the stripe batik cut **four** 34" lengths x 44" WOF; trim each length to a 34" x 34" square, trimming excess off on the selvege edge side. You will now have **four** 34" striped Batik squares. Set aside the trimmed sections for the border (about 8" wide).

From the Solid, cut into **eleven** 1-1/2" x 44" WOF strips and **seven** 2-1/4" x 44" WOF strips for binding.

SEE THE ILLUSTRATION BELOW FOR DIRECTIONS IN CUTTING THE BIAS STRIPES.

1. On two of the squares, with stripes horizontal, fold fabric in half diagonally from the top right corner to the bottom left corner. Fold one more time diagonally.
2. Rotate the triangle so that the single fold is on the bottom and double fold on the right. Line up the bottom of your ruler along the single folded edge and trim a small sliver off the double fold edge. This creates a 45° angle across the center of the square.
3. Rotate the triangle so that the trimmed edge is on the left. Line up the edge of your ruler along the trimmed edge and cut three 4-1/2" wide sections. They will be different lengths.
4. On the remaining two squares, fold fabric in half diagonally from the top right corner to the bottom left corner. Fold one more time diagonally.
5. Repeat steps 3 and 4.

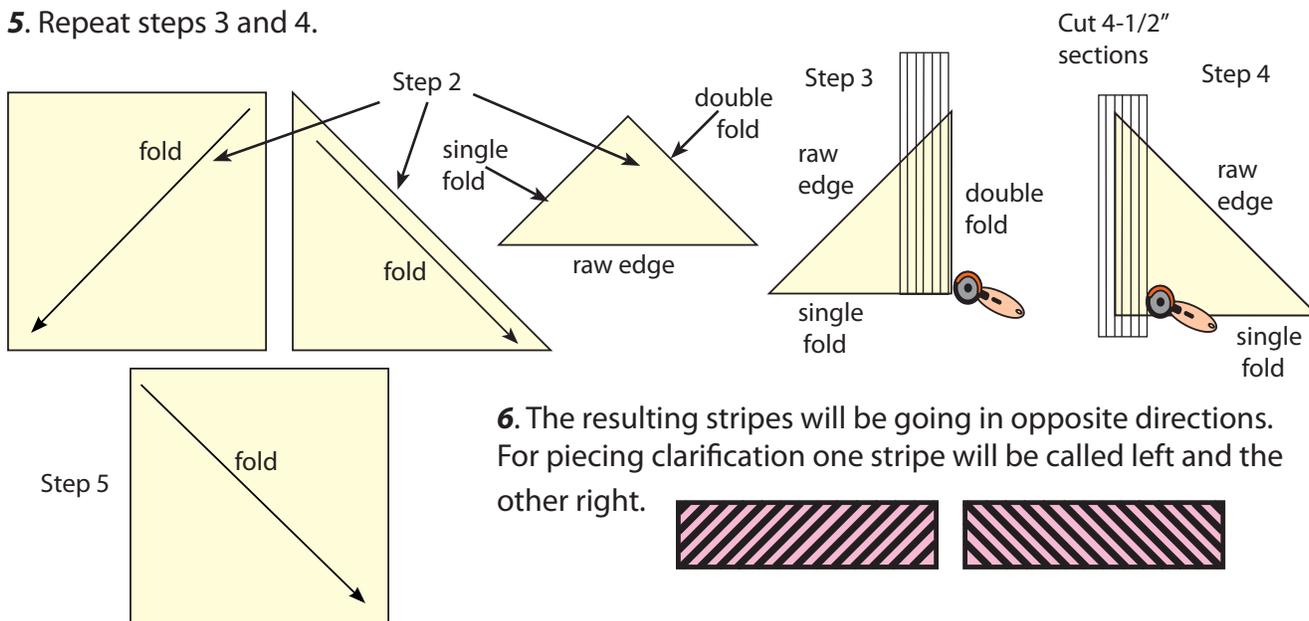

6. The resulting stripes will be going in opposite directions. For piecing clarification one stripe will be called left and the other right.





Piecing instructions cont'

7. Trim the longest stripes to 4-1/2" x 30". Save cut off sections. Lay two smaller right stripe sections (make use of the leftover pieces) out as illustrated and trim one strip 1/4" from the black stripe and one strip 1/4" from the color stripe.



8. Align the edges of the strips, right sides together, as illustrated, so that the two points extend approximately 1/4". Sew along the stripe line. Press seam open. Trim to 30". Make **ten** left and **ten** right 4-1/2" x 30" lengths.

9. Trim the end of a stripe so that 1" of the black stripes is in the corner, as shown in the top right of this photo.

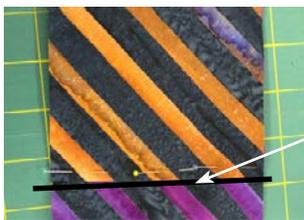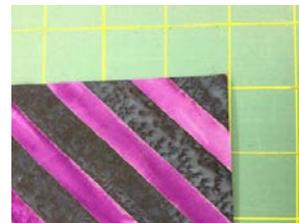

10. Take one strip from the right set and one from the left set and line up the black stripes on top of each other, right sides together. Trim edges even and sew with 1/4" seam. Press seam open. Fold strip in half and trim to 27-3/4". Total strip will equal 55-1/2". Repeat this with **nine** more sets of left and right stripes.



11. Sew the **eleven** 1-1/2" x 44" WOF Solid strips together into one long 1-1/2" strip using diagonal seams to join strips. Divide into **six** 1-1/2" x 55-1/2" and **two** 1-1/2" x 46-1/2".

12. Sew a Solid strip to a bias stripe set, matching centers and ends, pin carefully and sew. *Tip: Place the batik stripe on a flat surface, right side up and the black strip on top of that, right sides together and pin (a lot). This will keep the bias stripe fabric from stretching. Sew with the stripe fabric on the bottom.* Press to the solid strip.


13. To create the diamond, sew a batik stripe set to the first stripe set, rotating the strip so that the small black corners match in the center. Repeat for **five** sets total. *Due to the nature of the batiks, all of the stripes will not line up perfectly so don't try to do that!* Press seam to the side.



14. Sew the **five** sections together. Sew a 1-1/2" x 55-12" Solid strip to the remaining right side. Press to black strip

15. Sew a 1-1/2" x 46-1/2" Solid strip to the top and bottom, matching centers and ends. Press to Solid strip.

16. With the fabric that was trimmed off the 34" width of the stripe, cut each set into **seven** 3-1/2" x 44" WOF. These stripes will go straight across.

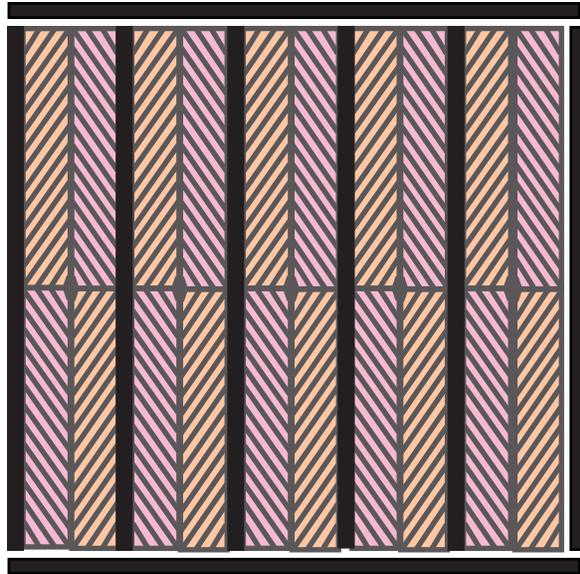

17. Sew the **seven** 3-1/2" stripe strips, short ends together with straight seams. Cut into two 59" and two 70" lengths.

Mitered Border

18. Fold each 59" and 70" border batik strip in half and mark the centers with pins. Measure the quilt from top to bottom and side to side through the center and divide these measurements in half. Measuring from the center out, pin-mark the lengths on each end of the batik border strips.


19. Right sides together, pin the respective border strips to the quilt top, matching centers and end marks. Sew the border to the quilt top, starting and stopping the stitching 1/4" from each end. Back stitch at each end to secure the stitches. Do not trim the excess border length. Repeat with the other borders.

20. To miter the borders, fold one corner of the quilt on a 45° angle so that the border strips are directly on top of one another and the seams nest together. Place your rotary ruler on the fold of the quilt so that the long edge is against the fold and the 45° line is on the side seam. Draw a line from the corner of the quilt top to the outside edge of the border. Pin the borders together. (See image on top left of page 4.)

21. Position your needle on the inside corner where the border meets the quilt. Stitch directly on the line you have drawn to the outside edge of the border.

22. Trim the excess fabric leaving a 1/4" seam allowance. Press open. Repeat the process with the remaining three corners of the quilt.

Mitered border illustration.

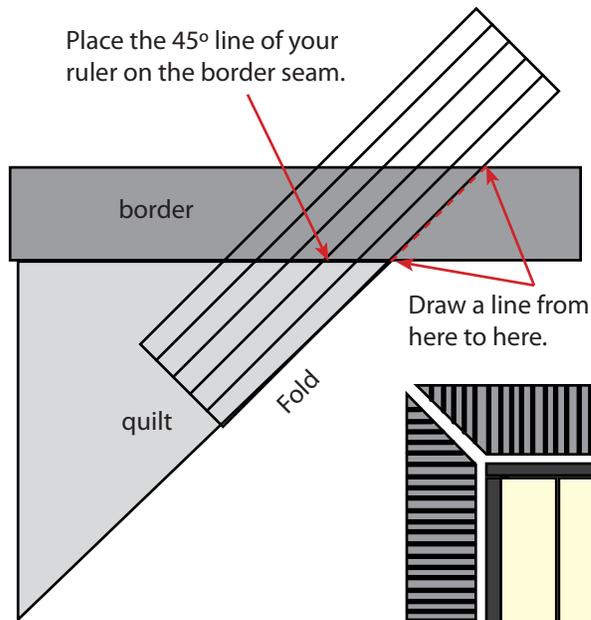


24. Sew the **seven 2-1/4"** Solid binding strips short ends together with diagonal seams. Fold and press the resulting long strip in half lengthwise with wrong sides together. Sew to the quilt front, matching raw edges and mitering the corners.

25. Fold the binding to the quilt back and hand-stitch the folded edge to the quilt back.

FINISHING

23. Layer the quilt top, batting and backing and quilt as desired.

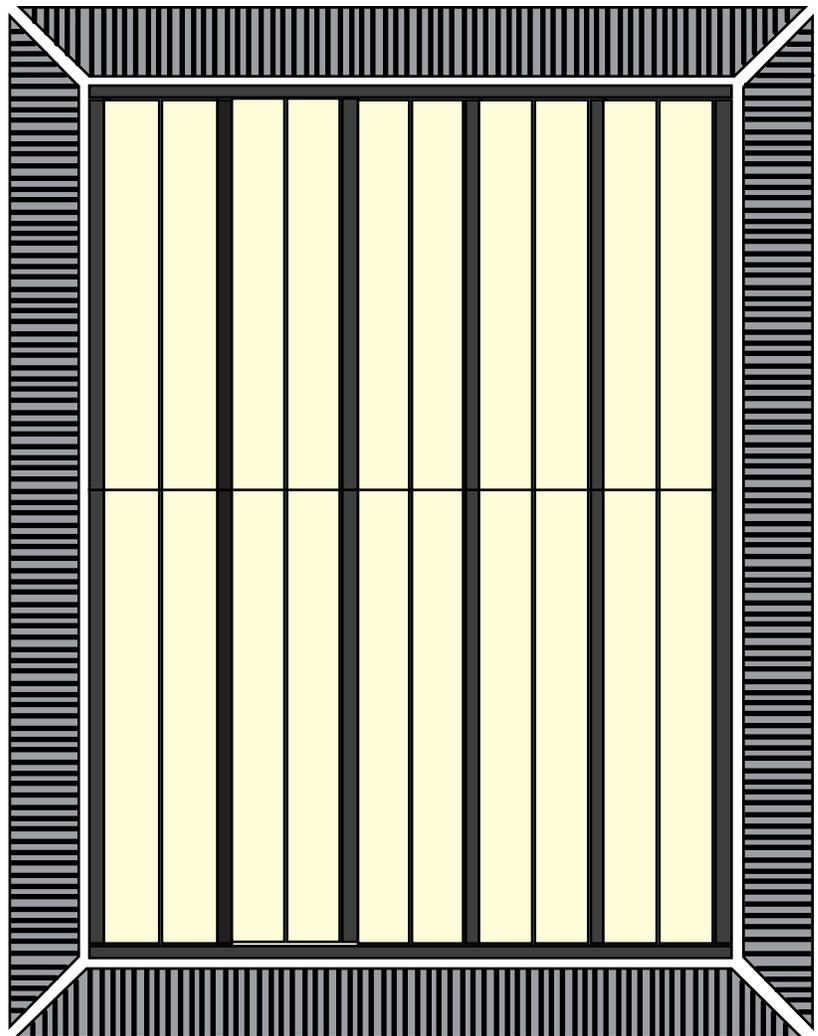

REMEMBER TO PUT A LABEL ON THE BACK AND ENJOY!