

Visions of Paradise Quilt Golden Dynasty



85" x 98"


*This pattern features
Kona Bay Fabrics
Paradise Collection*

Cut strips as indicated in chart then cut smaller pieces listed from these strips.

*Yardages listed are for regular cuts if "Fussy Cutting" extra yardage will be needed. Amounts needed will vary depending on motif selection and fabric repeats.


Backing-7¾ yards
Batting-93" x 106"


Lightweight Fusible Web-3½ yards
Stablizer-3½ yards

Fabric Name, Placement & Yardage	First Cuts	Next Cuts
 Fabric A-PARA-04 Cream Block Background 2⅔ yards	12	7½" x 42" 60 7½" squares


Fabric Name, Placement & Yardage	First Cuts	Next Cuts
 Fabric E-PARA-03 Gold Block Accent ⅔ yard	6	3½" x 42" 60 3½" squares

 Fabric B-PARA-01 Gold Circles 1½-2½ yards* *depending on motif selections	30	Circles Refer to Adding the Appliqué prior to cutting and sewing
-----------------------------------------------------------------------------------------------------------------------------------------------------------------------	----	------------------------------------------------------------------------

 Fabric F-PARA-04 Indigo Block Accent, 1st Border & Binding 2¼ yards	6	3½" x 42"	60	3½" squares
	10	2¾" x 42" (Binding)		
	8	2½" x 42" (Border)		

 Fabric C-PARA-05 Gold Block Border 1⅞ yards	6	7½" x 42" 30 7½" squares
--------------------------------------------------------------------------------------------------------------------------------------	---	------------------------------

 Fabric G-PARA-02 Gold Outside Border 2½ yards OR 3¾ yards	10	8" x 42"	
	4	8" x 42" (selvage to selvage)	
	2	100" x 8" (length of selvage)	

 Fabric D-PARA-05 Green Block Border 1⅞ yards	6	7½" x 42" 30 7½" squares
---------------------------------------------------------------------------------------------------------------------------------------	---	------------------------------


This pattern is not for resale, for personal use only.

Let's Begin


Before you begin read all instructions. Referring to project Cutting Chart, cut First Cuts strips as indicated in chart then cut smaller pieces listed under Next Cuts from these strips. Use an accurate $\frac{1}{4}$ "-wide seam allowance and press seams in the direction of arrows as indicated in each diagram.

Making the Block


1. Making Half-Square Triangles units, draw a diagonal line on one $7\frac{1}{2}$ " Fabric A square. Place marked square and one $7\frac{1}{2}$ " Fabric C square right sides together. Sew a scant $\frac{1}{4}$ " away from drawn line on both sides, cut on drawn line, and press. Make thirty. Trim squares to 7" to make sixty half-square triangle units

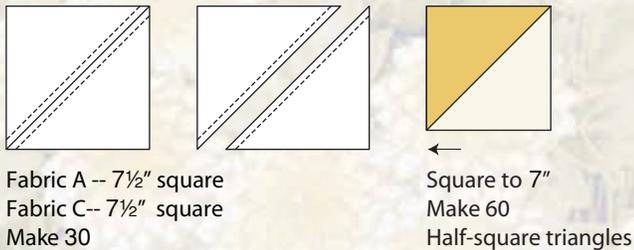


2. Making Simple Triangles units, draw a diagonal line on the wrong side of one $3\frac{1}{2}$ " Fabric F square. This will be your sewing line. Place marked squares on one unit from step 1 as shown. Stitch on drawn line, trim $\frac{1}{4}$ " away from stitch line and press. Make sixty. Label these Unit 1.




3. Making Half-Square Triangles units, draw a diagonal line on one $7\frac{1}{2}$ " Fabric A square. Place marked square and one $7\frac{1}{2}$ " Fabric D square right sides together. Sew a scant $\frac{1}{4}$ " away from drawn line on both sides, cut on drawn line, and press. Make thirty. Trim squares to 7" to make sixty half-square triangle units.

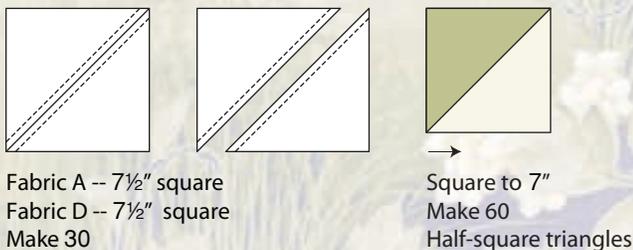

4. Making Simple Triangles units, draw a diagonal line on the wrong side of one $3\frac{1}{2}$ " Fabric E square. This will be your sewing line. Place marked squares on one unit from step 1 as shown. Stitch on drawn line, trim $\frac{1}{4}$ " away from stitch line and press. Make sixty. Label these Unit 2.




5. Sew one Unit 1 to one Unit 2 as shown. Press. Make sixty. Sew two of these units together as shown. Press. Make thirty.

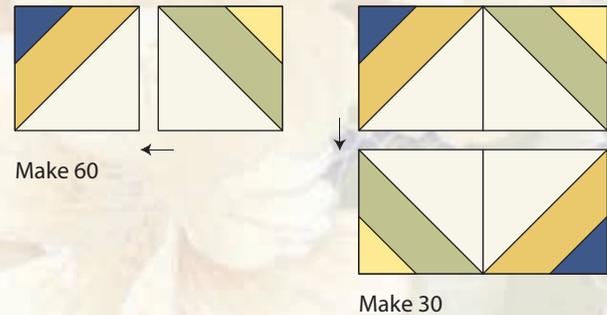

Adding the Appliqué Circles

The instructions given are for Quick Fused Appliqué Method other methods can be used if desired. If hand appliquéing add $\frac{1}{4}$ " seam allowance to circle pattern. Note: It is recommended to use removable stabilizer on the wrong side of the fabric when machine appliquéing. This will give stability to the piece, even stitching, and prevent puckering of fabric.


1. Trace circle pattern on paper side of lightweight fusible web leaving $\frac{1}{2}$ " space between pieces. Cut approximately $\frac{1}{4}$ " away from trace line.
2. With fusible web paper-side up, fuse to wrong side of Fabric B piece following manufacturer's instructions. Cut on traced line.
3. Center and fuse appliqué to blocks. Finish all appliqué edges with machine satin stitch or other decorative stitching as desired.



Make 30
Block measures $13\frac{1}{2}$ " square

Adding the Borders

1. Referring to layout, arrange and sew together six rows with five blocks each. Press seams in opposite direction from row to row. Sew rows together. Press.

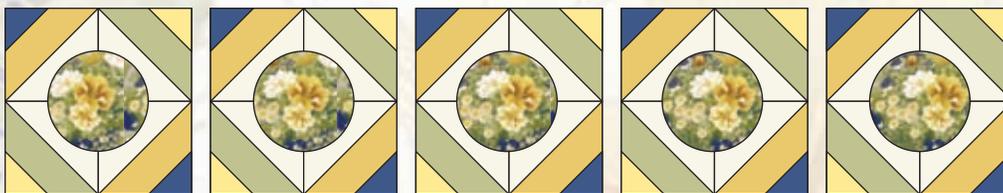

Make 6

Press seams in opposite directions from row to row.

2. Sew $2\frac{1}{2}$ " x 42" Fabric F strips end-to-end to make one continuous $2\frac{1}{2}$ "-wide strip. Press. Measure quilt from side to side. Cut two $2\frac{1}{2}$ "-wide strips to this measurement. Sew to top and bottom of Quilt. Press seams toward border.

3. Measure quilt through center from top to bottom, including borders just added. Cut two $2\frac{1}{2}$ "-wide Fabric F strips to this measurement. Sew to sides of quilt and press.

4. Referring to steps 2 and 3 to join, measure, trim and sew 8" x 42" Fabric G strips to top, bottom, and sides of quilt. Press.

Finishing the Quilt

1. Cut backing fabric piece into three equal pieces. Sew pieces together to make one 93" x 120" approximate backing piece. Press.

2. Press backing and quilt top trimming all excess threads. Layer and baste backing, batting, and quilt top together. Hand or machine quilt as desired.

3. Sew $2\frac{3}{4}$ " x 42" Fabric F binding strips end-to-end to make one continuous $2\frac{3}{4}$ "-wide strip. Press. Bind quilt as desired.



7" Circle Pattern

For Quick-Fused Method, trace 30 on paper-side of lightweight fusible web. To remove stiffness from quilt simply cut $\frac{1}{2}$ " on both side of drawn circle line, this will remove the center section of fusible web.

For hand appliqué add $\frac{1}{4}$ " seam allowance to pattern.