

Winged Glory

Quilt Designed by eQuilter



68" x 54"

Please read all instructions before beginning. Pre-washing NOT recommended.

Yardages and Cutting


WOF is width of fabric from selvage edge to selvage edge. LOF is length of fabric, parallel to the selvage edges. Remove as little fabric as possible when trimming selvages and squaring strip ends.

Winged Glory panel

- Trim to 42 1/2" wide x 28 1/2" tall, keeping the framing even from top to bottom and side to side.

2 yards border stripe

- Fussy-cut (4) 8" x LOF strips, beginning 1/4" out from the top of the blue sky and then cutting 8" over from there as shown. Trim to 2 strips each 67" and 53".

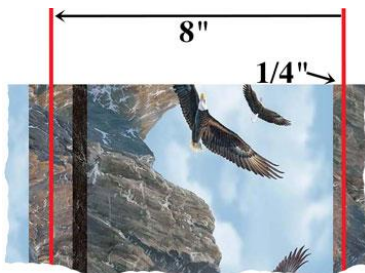

2/3 yard blue/purple texture

- 6 strips 3" x WOF for border.

5/8 yard navy texture

- 7 strips 2 1/4" x WOF for binding.

1 yard sky print

- 2 strips 3 1/2" x LOF; trim to 28 1/2" for side framing.
- 3 strips 3 1/2" x remaining WOF for top/bottom framing.

4 yards of 44/45" backing fabric

- 2 pieces 70" x WOF

OR

2 yards wide backing fabric

- 1 piece 84" x 70"

Batting

- 1 piece 70" x 84"

Completing the Quilt

Use a 1/4" seam allowance for all stitching. Press all seams as directed.

1. Sew the 3 1/2" x 28 1/2" sky strips to the sides of the panel. Press seams toward the strips.
2. Sew the 3 1/2" x remaining WOF sky strips short ends together to make a long strip. Press seams to one side. Cut into (2) 48 1/2" strips. Stitch to the top and bottom of the bordered panel to complete the 48 1/2" x 34 1/2" framed panel. Press seams toward the strips.
3. Center and sew 53" border stripe strips to the sides of the framed panel, beginning, ending and locking stitches 1/4" from the corners of the framed panel. Repeat with 67" strips on the top and bottom. Miter corners using your favorite method, checking to be sure that all



corners lie flat and the stripe sections match. Trim mitered corner seams to 1/4" and press open. Press border seams toward the border strips.

4. Repeat step 2 with the 3" x WOF navy/purple strips, cutting 2 strips each 68 1/2" and 49 1/2". Stitch the 49 1/2" strips to the sides of the quilt center and the 68 1/2" strips to the top and bottom to complete the top. Press seams toward the strips.

5. If using 44/45" backing fabric, remove the selvage edges from the backing pieces. Join the pieces on the long edges with a 1/2" seam allowance. Press seam open. Trim to make the 84" x 70" backing piece.

6. Layer the top with the backing and batting pieces. Quilt as desired. Trim batting and backing even with the top.

7. Join the navy texture binding strips on the short ends with diagonal seams to make a long strip. Press seams in one direction. Press the strip in half along the length with wrong sides together. Bind the quilt edges using your favorite method to complete the quilt.