


Steampunk Stallions

Quilt Designed by eQuilter

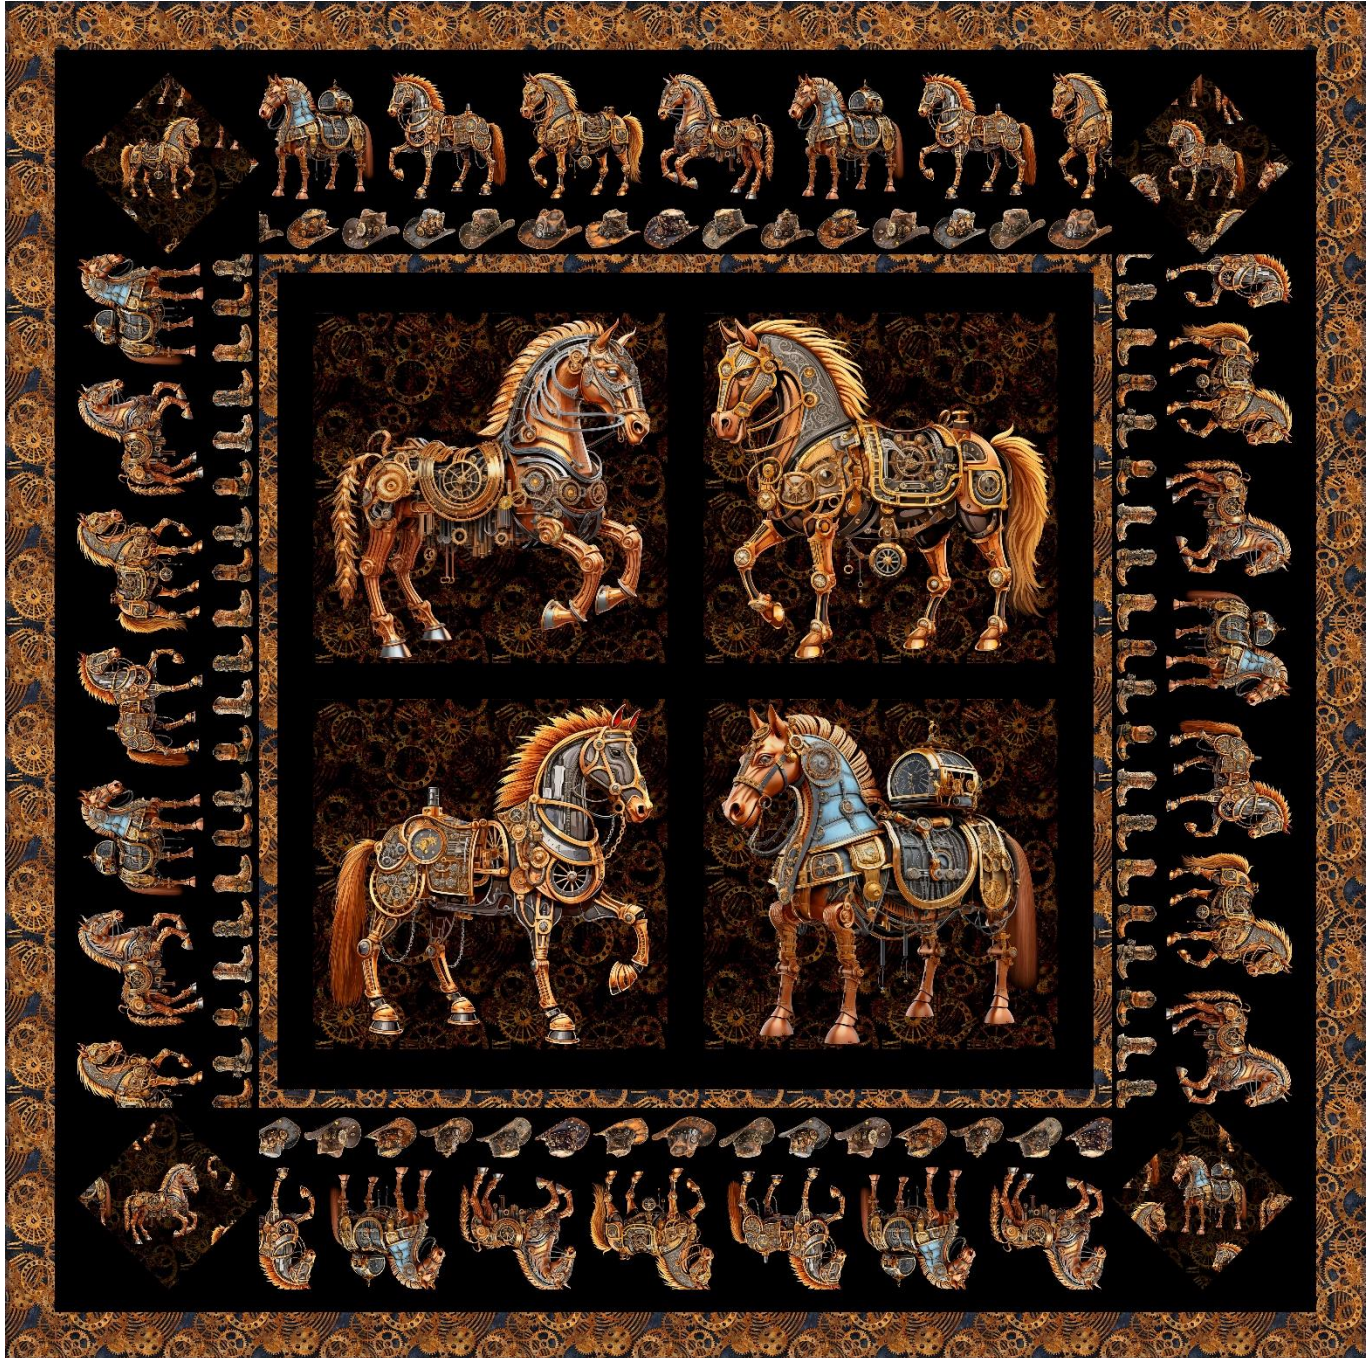

74 1/2" x 74 1/2"

Please read all instructions before beginning. Pre-washing not recommended.

Yardages and Cutting

WOF is width of fabric from selvage edge to selvage edge. Remove as little fabric as possible when trimming selvages and squaring strip ends.

Steampunk Stallions panel

- Trim panel to 41 1/2" x 41 1/2", keeping the framing even all around.

3/4 yard horse allover print

- Fussy-cut (4) 10 1/2" squares, centering on a horse in each square.

3/4 yard gray

- 8 strips 2 1/4" x WOF for binding.

1 1/4 yards black


- 5 strips 2 1/2" x WOF for panel framing.
- 7 strips 1 3/4" x WOF for outer border.
- 3 strips 5 1/2" x WOF; cut into (16) 5 3/4" squares.

1 yard brown gears

- 5 strips 1 1/2" x WOF for panel framing.
- 8 strips 3" x WOF for outer border.

1 1/2 yards Steampunk Stallions stripe

- Cut 4 strips 10 1/2" x WOF, first cutting 3/8" below the hats/boots and then cutting 10 1/2" from there as shown. Trim to 4 strips 47 1/2".



7 1/2 yards 44/45" backing fabric

- 3 strips 89" x WOF

OR

2 1/2 yards wide backing fabric

- 1 piece 89" x 89"


Batting

- 1 piece 89" x 89"

Completing the Quilt

Use a 1/4" seam allowance for all stitching. Press all seams as directed. Refer to the exploded quilt diagram on the next page as needed throughout the following steps.

1. Stitch the (5) 2 1/2" x WOF black strips short ends together to make a long strip. Press seams to one side. Cut into 2 strips each, 41 1/2" and 45 1/2". Sew the shorter strips to the sides of the quilt center and the longer strips to the top and bottom of the quilt center to complete the quilt top. Press seams toward the black strips.
2. Stitch the (5) 1 1/2" x WOF brown strips short ends together to make a long strip. Press seams to one side. Cut into 2 strips each, 45 1/2" and 47 1/2". Sew the shorter strips to the sides of the quilt center and the longer strips to the top and bottom of the quilt center to complete the quilt top. Press seams toward the brown strips.
3. Draw a diagonal line from corner to corner on the wrong side of the 5 1/2" black squares.
4. Place marked 5 1/2" squares right sides together on opposite corners of the horse allover squares. Sew on the line. Trim 1/4" out from the stitching. Press the black triangles over with seam allowances toward the squares. Repeat on the remaining corners of the squares to complete (4) 10 1/2" x 10 1/2" Corner blocks.



5. Sew (2) 10 1/2" x 47 1/2" horse stripe strips to the sides of the quilt center. Press seams toward the strips.
6. Sew Corner blocks to the ends of the remaining (2) 10 1/2" x 47 1/2" horse stripe strips. Press seams toward the strips. Stitch the strips to the top and bottom of the panel section to complete the 67 1/2" x 67 1/2" quilt center.
7. Stitch the (7) 1 3/4" x WOF black strips short ends together to make a long strip. Press seams to one side. Cut into 2 strips each, 67 1/2" and 70". Sew the shorter strips to the sides of the quilt center and the longer strips to the top and bottom of the quilt center. Press seams toward the black strips.
8. Stitch the (7) 3" x WOF brown strips short ends together to make a long strip. Press seams to one side. Cut into 2 strips each, 70" and 75". Sew the shorter strips to the sides of the quilt center and the longer strips to the top and bottom of the quilt center to complete the quilt top. Press seams toward the brown strips.
9. If using 44/45" backing fabric, remove the selvage edges from the backing pieces. Join the pieces on the long edges with a 1/2" seam allowance. Press seam open. Trim to make the 89" x 89" backing piece.
10. Layer the top with the backing and batting pieces. Quilt as desired. Trim batting and backing even with the top.
11. Join the gray binding strips on the short ends with diagonal seams to make a long strip. Press seams in one direction. Press the strip in half along the length with wrong sides together. Bind the quilt edges using your favorite method to complete the quilt.

