

# Steampunk Undersea

Quilt Designed by eQuilter



63 1/2" x 71 1/2"



*Please read all instructions before beginning. Pre-washing NOT recommended.*

## Yardages and Cutting

*WOF is width of fabric from selvage edge to selvage edge. LOF is length of fabric, parallel to the selvage edges. Remove as little fabric as possible when removing selvages and squaring strip ends.*

### Steampunk Undersea panel


- Trim to 35 1/2" x 42 1/2", keeping the black framing even.

### Steampunk Undersea squares

- Fussy-cut (4) 10 1/4" squares, keeping the black framing even.

### 1 1/2 yards Steampunk Undersea border stripe

- Fussy-cut (4) 10 1/4" x LOF strips, beginning 1/4" out from the yellow stripe at the bottom of the wider animal stripe and cutting 10 1/4" over from there. Trim to 2 strips each 46 1/2" and 38 1/2".

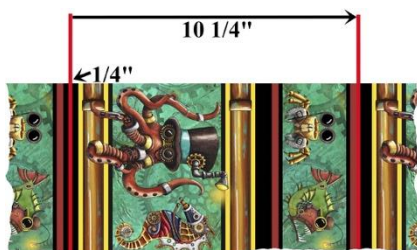

### 3/4 yard red print

- 8 strips 2 1/4" x WOF for binding.

### 1 yard green print

- 2 strips 2 1/2" x WOF; trim to 38 1/2".
- 2 strips 2" x WOF; trim to 42 1/2".
- 7 strips 2 1/2" x WOF for border.

### 1/2 yard black print

- 7 strips 1 1/2" x WOF for border.

### 5 yards of 42" backing fabric

- 2 strips 87" x WOF.

**OR**

### 2 1/4 yards wide backing fabric

- 1 piece 79" x 87"

### Batting

- 1 piece 79" x 87"

## Completing the Quilt

*Use a 1/4" seam allowance for all stitching. Press seams as directed. Refer to the exploded quilt diagram on the next page throughout the following steps.*

1. Sew the 2" x 42 1/2" green strips to the long sides of the large panel. Press seams toward the strips. Stitch the 2 1/2" x 38 1/2" strips to the top and bottom to complete the 38 1/2" x 46 1/2" framed panel. Press seams toward the strips.
2. Stitch the 10 1/4" x 46 1/2" border stripe strips to the long sides of the framed panel. Press seams toward the framed panel.
3. Sew 10 1/4" panel squares to the ends of the 38 1/2" border stripe strips to make 10 1/4" x 58" strips. Press seams toward the squares. Stitch the strips to the top and bottom of the framed panel to complete the 58" x 66" quilt center. Press seams toward the strips.
4. Stitch the 2 1/2" x WOF green strips short ends together to make a long strip. Press seams to 1 side. Cut into 2 strips each 66" and 62". Sew the longer strips to the sides of the quilt center and the shorter strips to the top and bottom. Press seams toward the strips.
5. Repeat step 4 with the 1 1/2" x WOF black strips to complete the top, cutting 2 strips each 70" and 64".
6. If using 42" backing fabric, remove the selvage edges from the backing pieces. Join the pieces on the long edges with a 1/2" seam allowance. Press seam open. Trim to make the 79" x 87" backing piece.

7. Layer the quilt top with the backing and batting pieces. Quilt as desired. Trim batting and backing even with the top.

8. Join the red print binding strips on the short ends with diagonal seams to make a long strip. Press seams in one direction. Press the strip in half along the length with wrong sides together.

9. Bind the quilt edges using your favorite method to complete the quilt.

